


ARTronic® UPS

3 in 1 : Inverter, Charger & Static Switch

ART Power **MINI** 500-1000-1500-2000 VA



- Automatic line-to-battery switchover
- High efficient DC-to-AC conversion, minimizing energy loss.
- Rack Tower design for flexible placement
- 10 Amp built-in enhanced charger
- Intelligent 2-stage charger control for efficient charging and preventing overcharger
- Provides overload protection
- Auto restart while AC recovery
- Multi-function LED/LCD indications and buzzer alarm



Our work is power !





THE ART OF ELECTRONICS

ARTPower MINI 500-100-1500-2000 VA Technical Specifications

MODEL	ART Power MINI 500	ART Power MINI 1000	ART Power MINI 1500	ART Power MINI 2000
Capacity	500 VA / 300 Watt	1000 VA / 600 Watt	1500 VA / 900 Watt	2000 VA / 1200 Watt
AC Input				
Nominal Voltage	220 / 230 / 240 VAC			
Input Voltage Range	170 ~ 280 or 90 ~ 280 VAC			
Nominal Frequency	50 / 60Hz (Auto Detection)			
Input Voltage Range Selector				
Narrow	170 ~ 280 VAC			
Wide	90 ~ 280 VAC			
Inverter Mode Output				
Voltage	± 10 %			
Frequency	50 / 60Hz ± 0.1Hz			
Waveform	Modified Sine-wave			
Efficiency (AC to AC)	> 95 %			
Efficiency (DC to AC)	> 80 %			
Battery				
Nominal Voltage	12 V DC		24 V DC	
Charger				
Charging Voltage	13.7 V		27.4 V	
Charging Current	10A ± 1A Max.			
Overcharging Protection	16 V		32 V	
Transfer				
Transfer Time	Typical 8 ms, 20 ms max			
Indicator				
Line Mode	Green LED blinks or lights steadily			
Battery Mode	Yellow LED lights			
Overload/fault	Red LED blinks or lights steadily			
Audible Alarm				
Low Battery Voltage in Battery Mode	Beeps every 2 seconds			
Overload	Beeps every 0.5 seconds			
Fault	Beeps continuously			
Environment				
Temperature	0 ~ 40°C			
Physical				
Dimension DxWxH (mm)	249 x 270 x 93			
Net Weight (kg)	3.1 kg	3.6 kg	3.9 kg	3.9 kg
Protections				
Deep Discharge, Overcharge, Short Circuit, Overload, Battery Short, Over Voltage, Under Voltage				

*Product specifications are subject to change without further notice to third parties. © ARTronic Elektronik San. Müm. Tic.A.S.

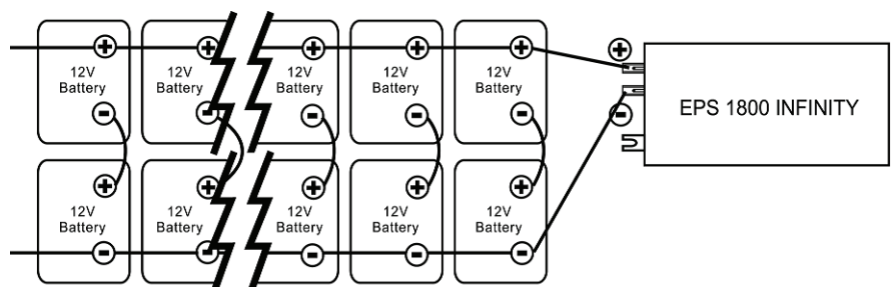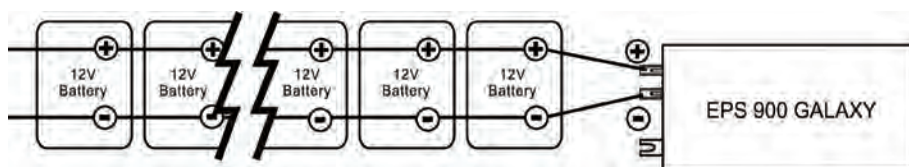

ARTronic®

The art of electronics

Tel: (216) 365 82 21 / Faks: (216) 420 97 70

artronic@artronic.com.tr www.artronic.com.tr

Rhea elektro s.r.o.

Elektrárrenská 1/12440, 831 04 Bratislava

Tel.: +421 2 4910191

info@rhea-elektro.sk