eco^{px} SYSTEM HYBRID POWER SOLUTIONS



Use our energy to save yours ECO

eco^e

Key features

- »Unique hybrid technology, compatible with solar power, genset, wind power
- » Radical reduction in wireless infrastructure OPEX
- »Increase in site reliability
- »Innovative modular architecture for high availability (redundancy) and reduced maintenance
- Single controller for management of all aspects of energy generation and storage, as well as load management
- » Rapid return on investment
- » Flexibility to meet evolving network needs

Turn to a telecom power expert for a reliable solution

Environmentally-sound power solutions, combining renewable energy sources with back-up batteries, enable Communications Service Providers to lower costs by reducing reliance on diesel generators.

The eco^{px} solution manages network site power from end-to-end: from energy generation to energy storage, load surveillance and remote management. eco^{px} offers unmatched OPEX, security and reliability benefits.

Applications

Off-grid and intermittent grid Wireless sites

As Communications Service Providers continue to expand their network coverage into rural and remote areas lacking access to reliable electrical grid power, our eco^{px} hybrid solutions are there to provide the reliable power you need, without the need for frequent fuel delivery or service visits.


Broadband and Fixed line

It's not just remote wireless sites which can benefit from eco^{px}. eco^{px} solutions can equally be applied to fixed line and gridconnected applications to help reduce the soaring cost of energy which arises from powering today's 'always on' world.

The Smart Grid

With our off-grid and grid-connected hybrid solutions, optimized cost of ownership, network design/build and sophisticated data acquisition expertise, you're ready for the migration to distributed generation and smart grid energy for your telecom network.



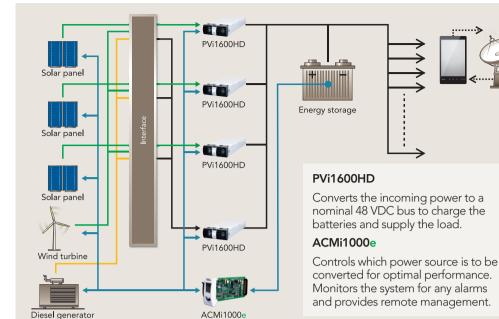

Technical Highlights

AEG PS' eco^{px} hybrid power solution delivers a world of benefits for your network:

Use any combination of diesel, solar and wind power sources

A single controller (ACMi1000e) manages the power solution end-to-end, seamlessly selecting the appropriate source for best OPEX

- Photovoltaic arrays: MPPTenabled solar converters (PVi1600HD) maximize solar energy production and protect your PV investment
- »Generator: Intelligent management reduces fuel consumption by 50 % or more in generator/battery hybrid configurations by operating the generator for short periods at optimum load to charge the batteries. The results include reduced fuel consumption, less frequent servicing and prolonged generator lifetime - all of which help further reduce OPEX

- Wind turbine: operating with winds from a 'whisper' to stormforce without shutting down, and with class leading energy yield to reduce OPEX
- » Grid connected (mains): as a primary source or as back-up
- » Batteries: charge rate optimized according to discharge history to maintain the battery in peak condition and prolong its life by up to 25 %. Battery chemistry/ technology agnostic
- »Flexibility: the system is designed to be upgradable to meet future expansion.

Integrated Technology

AEG PS' eco^{px} solution has been developed with the benefit of more than six decades of telecom expertise:

- » First fully integrated true hybrid system
- » Flexible, modular solution architecture
- State-of-the-art, high efficiency, power conversion technology
- High temperature rated components to avoid the need for special cooling

- » Single, powerful controller to simplify the system
- » Software-implemented algorithms for flexibility and future needs
- » Advanced control command logic and system functionalities
- » Complete data management and data logging
- »Complete remote communication options

Integrated Technology

AEG PS' solutions are specifically designed for use in hybrid telecom systems – in autonomous, remote off-grid systems and grid-connected configurations. Our specialists will optimize the sizing of each power source to provide the best balance of system (BOS) equipment for each site. AEG PS offer a complete solution for all your needs; consulting, system design, products, installation and maintenance.



	eco ^{px} 4801	eco ^{px} 1122	
POWER OUTPUT			
Maximum configuration	4 x PVi1600HD converters	8 x PVi1600HD converters	
Maximum Power (N+1)	4.800 W	11.200 W	
PHOTO-VOLTAIC MODE			
NPUT SPECIFICATION			
Nominal voltage	255 \	/DC	
/oltage Range	Full power between 230 to 420 VDC / 170 to 230 VDC with power deratir		
Maximum input current	8 A per PV string		
OUTPUT SPECIFICATION			
Nominal voltage	48 VDC		
/oltage Range	42 to 58 VDC		
Full power (N+1)	4.800 W	11.200 W	
Maximum output current	90 A	210 A	
Efficiency	93 % typical at 50 % load		
DIESEL GENERATOR MODE			
NPUT SPECIFICATION			
Nominal voltage	230	230 VAC	
/oltage Range	Full power between 207 to 253 VAC /	Full power between 207 to 253 VAC / 180 to 280 VAC with power de-rati	
requency	45 to 66 Hz		
Power factor	0.99 typical from 50 % load		
Maximum input current	34 A	68 A	
DUTPUT SPECIFICATION	0.77	0071	
Nominal voltage	48 V	íDC.	
/oltage Range	40 VDC 42 to 58 VDC		
Full power (N+1)	6.400 W	12.800 W	
Aaximum output current	120 A	240 A	
Efficiency	91 % typical		
PROTECTION	71 /01	урісаі	
	Ve		
V string surge protection device type II	Yes Yes		
AC input surge protection device type II	TE	25	
Number of DC input PV string nsulation switches	3	7	
AC input protection MCB	Yes		
nput voltage protection	PVi1600HD module – shutdown, in PV mode, with automatic restart when voltage is within operating range		
oft start	Yes		
Dutput power & current limiting	Yes		
nput voltage protection	PVi1600HD module – programmable protection with automatic re-star latched after the second fault		
det pluggable convertors			
Hot pluggable converters	Yes		
Thermal protection	Automatic power de-rating and excessive temperature shutdown, with pre-shutdown alarm		
Battery deep discharge protection	Yes		
SYSTEM MANAGEMENT			
Controller	ACMi1000e		
Real time clock	Yes		
Hybrid power sourcemanagement	Ye	es	
Genset operation optimisation	Yes		
Control & monitoring of converters	Via CAN Bus		
Battery Management	Advanced battery management algorithm, charging modes, temperature compensation, battery tests, current limitation and deep discharge protection		
Load management			
	Yes Yes		

ecopx SYSTEM

	eco# 4801	eco# 1122
COMMUNICATION		
Local interface	Back-lit, graphical LCD and joystick, USB connector and two LED's (Power and Fault)	
Remote communication	4 off volt-free relay contacts, GSM modern (optional) and TCP/IP and SNMP server (optional)	
Communications protocol	AEG PS proprietary protocol on RS232, ModBus, Modern Management with auto-dial feature, TCP/IP connectivity (with NCS options): SNMP/Web/Telnet	
MECHANICAL		
Outdoor cabinet dimensions (H x W x D)	1.600 mm x 800 mm x 800 mm	
Indoor cabinet dimensions (H x W x D)	1.700 mm x 600 mm x 600 mm	
Available space for other equipment	BU of free space for additional equipment (Telecom Equipment, Inverters, etc) Details on request	7U of free space for additional equipment (Telecom Equipment, Inverters, etc) Datails on request
ENVIRONMENTAL		
IP Rating	Indoor cabinet – IP20, Outdoor cabinet – IP55	
Cooling	Forced air, front to back with automatic speed control	
Operating Temperature	-20 °C to +70 °C	
Storage Temperature	-50 °C to +85 °C	
Humidity	5 % to 95 % Non-condensing	
RoHS	2002/95/EC	
WEEE	2002/96/EC, 2003/108/EC	
Altitude	up to 2,500 m without de-rating	
RECILIATORY STANDARDS		
SAFETY		
International	EN60950-1	
Safety Approvals	CE	
ELECTRO-MAGNETIC COMPATIBILITY (EWC)		
Emissions, Conducted	ENS5022, Class B	
Emissions, Radiated	EN55022, Class 8	
ININGUNITY		
ESD	IEC/EN61000-4-2	
Radiated 'E' field	IEC/EN61000-4-3	
Fast Transient Burst	IEC/EN61000-4-4	
Surge	IEC/EN61000-4-5	
Conducted RF	IEC/EN61000-4-6	
Radiated 'H' field	IEC/EN/61000-4-8	
Power Line Dips	IEC/EN61000-4-11	
'ANSI' Surge	IEEE C62.41	
Telecom Networks	EN300-132-2, EN300-386-2	



Autorizovaný distribútor pre Slovensko: Rhea elektro s.r.o., Elektrárenská 1/12440, 831 04 Bratislava Telefón: +421 2 49101914, -18 E-mail: info@rhea-elektro.sk www.rhea-elektro.sk

